

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Rec'd PCT/PTO 28 NOV 2004
PCT/SE 0 3 / 0 0 7 4 0

REC'D 28 MAY 2003

WIPO PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Baldwin Jimek AB, Arlöv SE
Applicant (s)

(21) Patentansökningsnummer 0201483-5
Patent application number

(86) Ingivningsdatum 2002-05-17
Date of filing

Stockholm, 2003-05-13

För Patent- och registreringsverket
For the Patent- and Registration Office


Sonia André

Avgift
Fee

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

A METHOD AND DEVICE AT A PRINTING PRESS SPRAY BEAM

Technical Field

5 The present invention relates to a method and device for keeping a spray nozzle in a printing press spray beam clean.

Background of the Invention

10 A spray beam is arranged in the proximity of a printing press roller for spraying fountain solution thereon. This fountain solution is needed for obtaining the intended printing function in the printing press, as is well known in the art. (Other liquids than fountain solution could alternatively be sprayed.)

15 It is also well known in the art that at the high speed rotation of the different rollers in the printing press, it is difficult to obviate the formation of a mist of printing ink and other matters in and around the press. The printing ink also causes certain problems in the
20 operation of the press.

 The printing ink mist causes clogging of the spray nozzles of the spray beam, so that their intended spray function gradually deteriorates and the spray pattern of the spray beam is changed.

25 A prior attempt to solve the problem with clogged spray nozzles in a special situation is revealed in WO 0187603, where an air stream is caused to flow towards the printing press roller in the spray casing covering the area between the spray beam and the roller.

30 The Invention

 According to the invention the above mentioned problem can be solved in that air with a certain overpressure is supplied to a cover surrounding the spray nozzle, the spray cone from the spray nozzle leaving the
35 cover undisturbed through a slot therein.

A device for carrying out this method is characterized by a cover, which surrounds the spray nozzle and has a slot for the spray cone from the spray nozzle to leave the cover undisturbed, and by means for supplying air
5 with a certain overpressure to the cover.

Favourable embodiments appear from the dependent claims.

The Drawings

The invention will be described in further detail
10 below under reference to the accompanying drawings, in which

Fig 1 is a diagrammatic cross section through a spray beam provided with a first device according to the invention,

15 Fig 2 is a perspective view of the first device of Fig 1,

Fig 3 is a cross section through a spray nozzle with a second device according to the invention, and

20 Fig 4 is a cross section through a spray nozzle with a third device according to the invention.

Detailed Description of Embodiments

A so called spray beam 1 is shown in a very diagrammatic cross section in Fig 1. The purpose of such a spray beam is to spray fountain solution on a rotating
25 printing press roller 2. Fountain solution is sprayed from a number of spray nozzles 3, placed in a row in the spray beam, through a spray casing 4 constituting the forward portion of the spray beam 1.

The purpose of the spray casing 4 is to keep the
30 fountain solution properly confined but also to prevent printing ink mist and other contaminants from reaching the spray nozzles 3.

However, in spite of these measures it is a known problem that the spray nozzles 3 may be clogged after a
35 certain operation time and may fail to function properly,

leading among other things to an impaired distribution of fountain solution over the width of the roller 2 to be sprayed.

Measures accordingly need to be taken to ensure that
5 the nozzles 3 are kept clean.

Figs 1 and 2 show a first embodiment of a device for this purpose.

An elongated, generally closed cover 5 is mounted over all the spray nozzles 3 on the spray beam 1. The cover
10 5 can be formed of stainless steel plate or the like, but the choice of material is of no significance for the invention. The cover 5 is provided in its back wall with openings 6 for the spray nozzles 3 and in its front wall with oblong holes or slots 7 enabling the spray cones from
15 the spray nozzles 3 to leave the cover 5 undisturbed.

Clean air with a certain overpressure is supplied to the interior of the cover 5 by means of an air conduit 8 from a main valve with a pressure regulator 9 and a
20 throttle valve 10 for controlling the air flow. In order to obtain the desired result, several air conduits 8 from the throttle valve 10 may be evenly distributed over the length of the cover 5. It may possibly be desired to provide the bottom of the cover 5 with a number of drainage holes (not shown).

25 The air will create a certain overpressure in the cover 5 and escape through its slots 7 without disturbing the spray cones from the spray nozzles 3. In this way contaminants are effectively prevented from reaching the spray nozzles 3, which accordingly will be kept clean for
30 an extended period of time.

A second embodiment is shown in Fig 3. Each spray nozzle 3 is connected to its spray valve 11 in the spray beam 1 by means of a cap 12, which may be made of a plastic material.

A cover 13 is individually provided for each spray nozzle 3. In the present case it has the form of a short sleeve 14, connected in a way not shown (but possibly by means of a bayonet joint) to the cap 12 and possibly made of a plastic material, and an end plate 15 inserted in a circumferential groove in the end of the sleeve 14. The end plate 15 has an oblong slot 16 for the spray cone from the spray nozzle 3 to pass through.

An air conduit 17 for the supply of clean air with a certain overpressure is connected to the sleeve 14. The air conduit 17 can be provided with a main valve with a pressure regulator 18 and a throttle valve 19 for controlling the air flow. The members 18 and 19 may be common for several air conduits 17 to several spray nozzles 3. Means may be provided in the cover 13 for evenly distributing the air inside the cover.

The sleeve 14 may be provided with a drainage hole 20 in its bottom portion.

The provision of a separate end plate 15 is based on manufacturing considerations. As an alternative the cover 13 may be made as an integrated unit.

The embodiment according to Fig 3 may be especially suitable for existing spray beams, as the cover arrangement for each spray nozzle may be mounted without modifications to the existing device.

The embodiment according to Fig 4 may be more suitable for new arrangements, where the design freedom is greater. In this case the spray valve 8 is provided with a separate main air conduit 21 extending from spray valve to spray valve in the spray beam. An air bore 22 extends forward in the valve from the air conduit 21. The diameter of the bore 22 is such that a throttling for the air is accomplished in order to control the air flow.

The cap device 23 for connecting the spray nozzle 3 with the spray valve 11 is integrated with the cover

arrangement 24, possibly having an end plate 25 provided with a slot 26.

A partition wall bearing against the spray nozzle 3 has a number of through holes 27 for supplying air into the
5 cover 24, which may be provided with a drainage hole 28.

It is believed that favourable results can be obtained with an air pressure in the region of 1.0- 1.5 bar, probably 1.2 bar, and an air flow of for example up to
1 litre/min or more, but these figures are in no way meant
10 to be limiting for the scope of the invention.

020515 SP 8:\PUBLIC\DOC\F\17930079.doc

CLAIMS

1. A method for keeping a spray nozzle (3) in a printing press spray beam (1) clean, c h a r a c t e r-
i z e d in that air with a certain overpressure is
5 supplied to a cover (5; 13; 24) surrounding the spray
nozzle (3), the spray cone from the spray nozzle leaving
the cover undisturbed through a slot (7; 16; 26) therein.
2. A device for keeping a spray nozzle (3) in a
printing press spray beam (1) clean, c h a r a c t e r-
10 i z e d by a cover (5; 13; 24), which surrounds the spray
nozzle (3) and has a slot (7; 16; 26) for the spray cone
from the spray nozzle to leave the cover undisturbed, and
by means (8-10; 17-19; 21, 22, 27) for supplying air with a
certain overpressure to the cover.
- 15 3. A device according to claim 2, wherein air is
supplied through an air conduit (8; 17; 21) and a
throttling device (10; 19; 22) for controlling the air
flow.
4. A device according to claim 2, wherein a number of
20 spray nozzles (3) in a row is surrounded by a common cover
(5) having a slot (7) for each spray nozzle.
5. A device according to claim 4, wherein the cover
(5) is a closed box having openings (6) in its back wall
for the spray nozzles (3).
- 25 6. A device according to claim 2, wherein a separate
cover (13; 24) is provided for each spray nozzle (3).
7. A device according to claim 6, wherein the cover
(13; 24) is provided with a drainage hole (20; 28).
8. A device according to claim 6, wherein an external
30 air conduit (17) is connected to the cover (13).
9. A device according to claim 6, wherein a spray
valve (11) for the spray nozzle (3) is provided with an
internal air conduit (21) and an air bore (22) connected to
the cover (24).

10. A device according to claims 3 and 6, wherein the air bore (22) has such a diameter that a throttling effect is obtained.

11. A device according to claim 6, wherein the cover
5 (13; 24) is formed as a short sleeve (14; 24) connected to a spray valve cap (12; 23) and having an end plate (15; 25) attached to its end remote from the spray nozzle (3), the end plate being provided with the slot (16; 26).

5
6
7
8
9
0



SUMMARY

In order to keep a spray nozzle (3) in a printing
press spray beam (1) clean, air with a certain overpressure
is supplied to a cover (5; 13; 24) surrounding the spray
5 nozzle (3), the spray cone from the spray nozzle leaving
the cover undisturbed through a slot (7; 16; 26) therein

To be published with Fig 3.

1
2
3
4
5
6
7
8
9
10

0001400-5

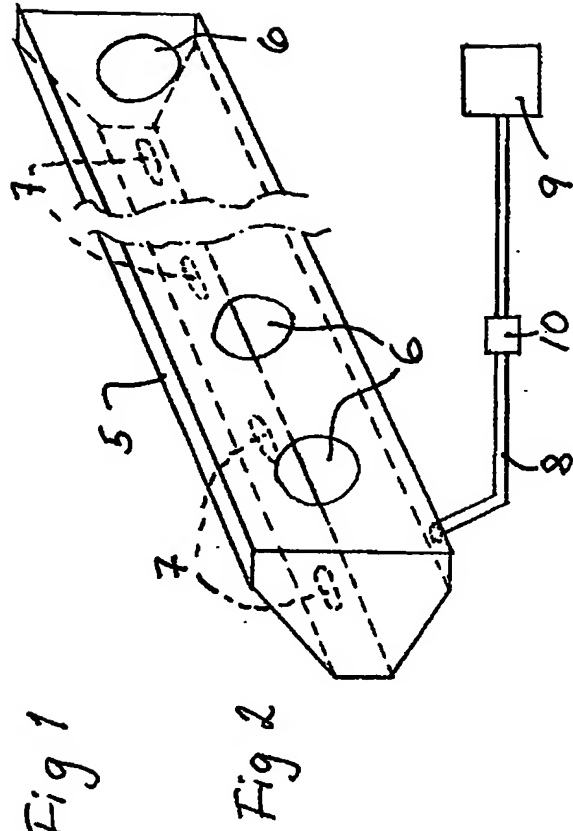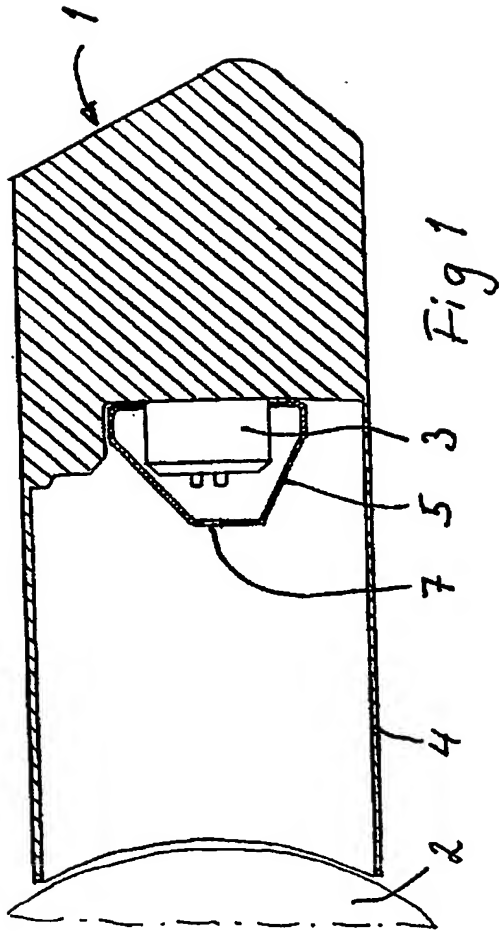

000160005

